

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 1 TOWNSHIP 14 RANGE 3

DATE: 7-31-04

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: _____

METHOD OF ESTABLISHMENT: County: 1-13-00


IN. S.P.C. E ZONE NAD '83

NAME: 14030105

N: 492801.5804(m)

E: 58630.8747(m)

NOTE: This corner position represents a title corner and may not necessarily be in the position of the Record corner.

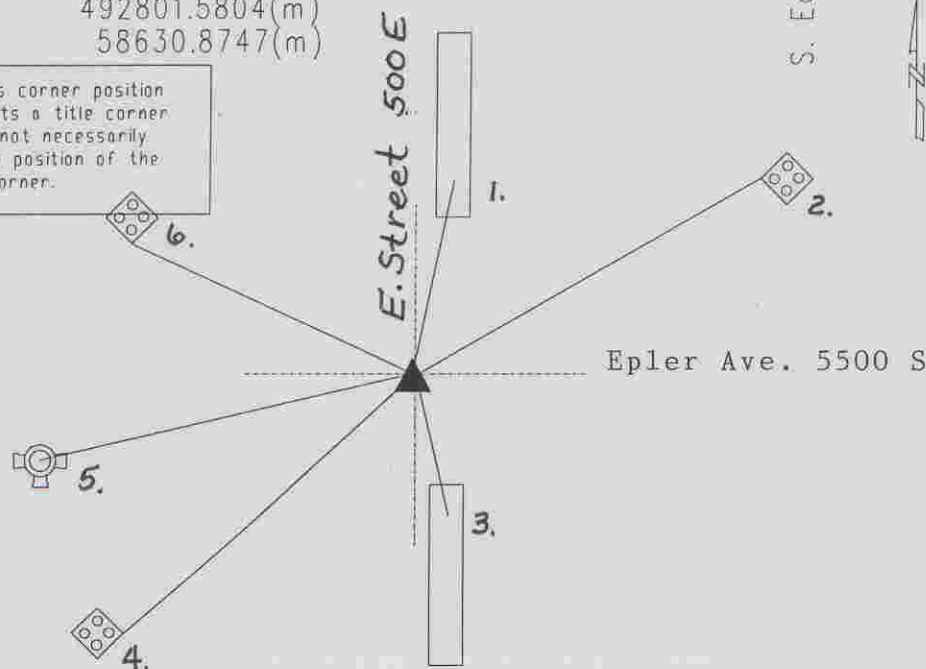

A survey by Percy Hasbrook on April 16,1849 indicates a rock with one witness and the stump of another. (Perry Legal Book p. 5) A survey by D.B.Hasbrook on April 4,1854 indicates the following witnesses: 20" hackberry bearing south 18 degrees, thence east 50 links and a 18" walnut bearing north 49 degrees, thence east 67 links.(Perry Legal Book p. 28) A survey by MCS in 1950's indicates a cut cross. Corner referenced by Wilcoxon on 6/4/75 and called a cut cross. Corner referenced by Miller on 9/13/76 and called a road nail set. Corner referenced by Gries on 9/29/86 and called a brass plug. Corner referenced by Wilcoxon on 10/1/95 and called a p.k. Nail over brass plug. Corner referenced by Wilcoxon on 1/13/00 and called a p.k. Nail over brass plug. Corner was excavated by Wilcoxon on 7/13/04 and a #205 cast iron Harrison Monument was set in position as the corner.

REF.	DISTANCE	DESCRIPTION
1.	61.33'	Cut 'x' S end of concrete median
2.	105.07'	Cut 'x' W corner of concrete base for aluminum pole
3.	60.63'	Cut 'x' N-end of concrete median
4.	70.35'	Cut 'x' E corner of concrete base for aluminum pole
5.	91.14'	Top nut of fire hydrant
6.	64.11'	Cut 'x' S corner of concrete base for aluminum pole